

BX550

Technical data



Thickness: 15-20 mm

Width: 240 mm

Length: 792-1525 mm

Hole spacing: 305 mm

BOROX® 500HB

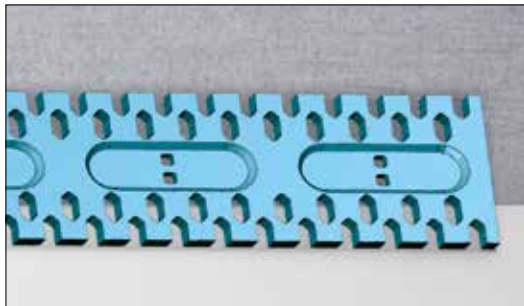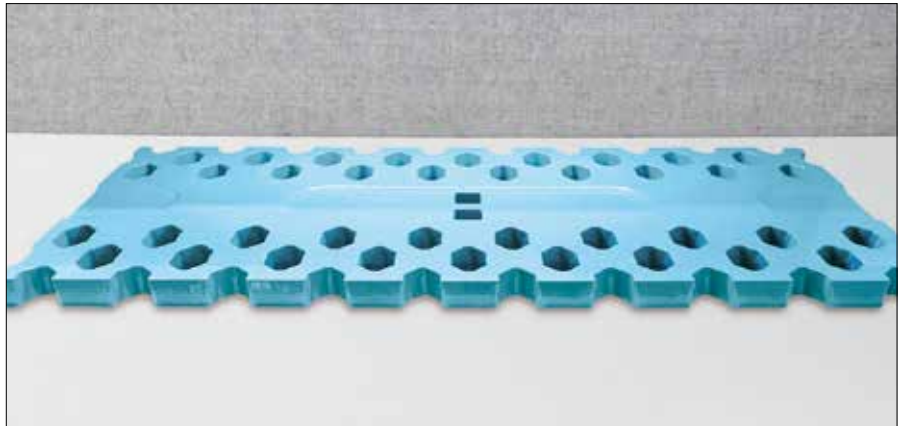

If you demand high durability for really tough conditions, we recommend BOROX® BX550, perforated blade with hardness 550 Brinell.

With BX550, you drive longer between replacements. It is mounted with both screws and nuts as well as with wedges and wedge bolts. Plow blades in 550 Brinell are also available as flat edges on page 8.

By using the adapter plate for mounting the BX550 you will simplify handling the blade and also improve the durability of the blade. For more information see page 24.



Article	Dimension		
	Width mm	Thickness mm	Längd mm
1258003	240	15	792
1258004	240	15	915
1258005	240	15	1220
1258006	240	15	1525
1258502	240	20	915
1258500	240	20	1220
1258501	240	20	1525

Other sizes are offered on request